


FUZION

ATHLETIC SURFACES

FitX offers a unique alternative to traditional hardwood flooring. Its attractive vinyl graphic wear layer combined with the closed foam shock absorbing pad offer a high-performance athletic surface at an affordable price.

FITX IS AVAILABLE IN 2 THICKNESSES

5mm and 7mm




Up to 85' rolls limit the cross seams for more durable finished installation.







FEATURES AND BENEFITS

-  Ideal for gymnasiums, multipurpose halls, and aerobic areas.
-  100% vinyl wear layer that offers superior durability to withstand all types of wear and tear including non-sporting events.
-  Superior ball rebound and shock absorption.
-  Final layout is fully customizable.
-  Heat welded seams create directional stability.
-  Anti-bacterial surface.
-  Excellent noise reduction properties.
-  No waxing or refinishing the floor.
-  Made from recycled materials.
-  15-year warranty.

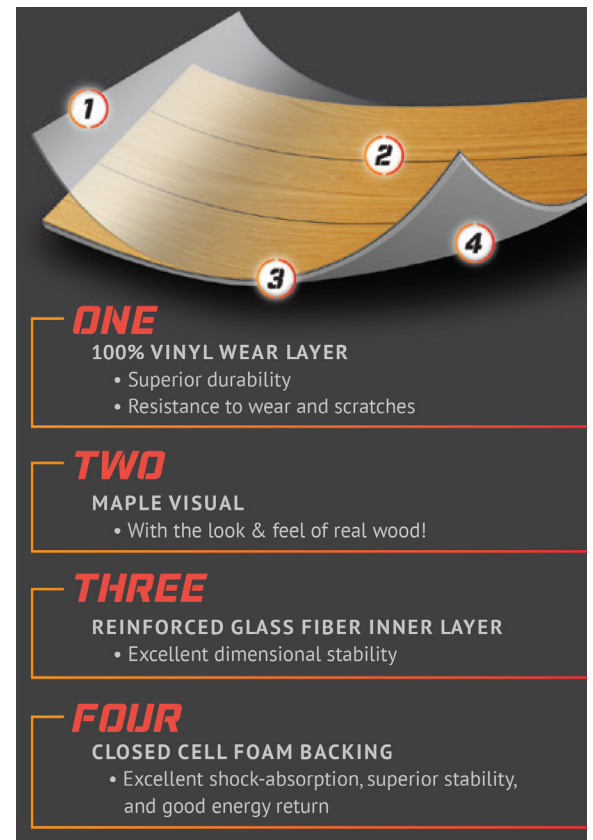

COLOR OPTIONS

*COLORS ARE REPRESENTATION ONLY

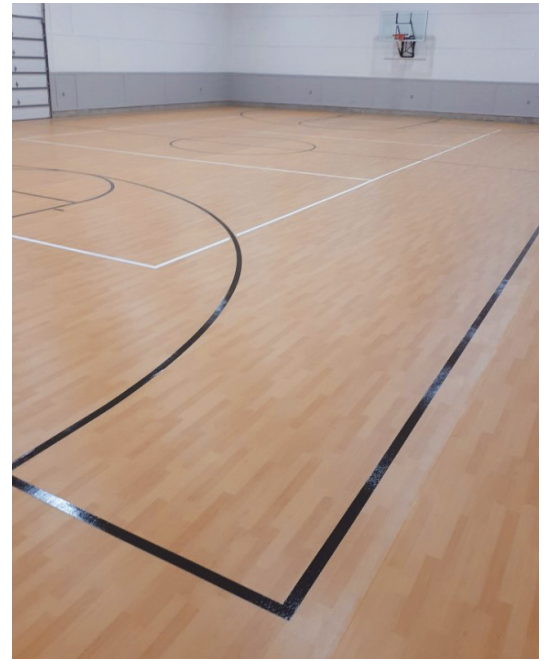

| SPORTS FLOORING | STANDARD | THICKNESS | RESULTS | SQ/FT PER ROLL |
|---------------------------------------|-----------------------------|-----------|-----------------------------|------------------------------|
| Width | | ALL | 5' 10" (1.8m) | 387.50 (36.0m ²) |
| FitX | | 5mm | 65' 7" (20m) | 503.75 (46.8m ²) |
| FitX | | 7mm | 85' 3" (26m) ⁽²⁾ | |
| American Sports Flooring Standard (5) | ASTM F2772 | ALL | Meets all Requirements | |
| European Sports Flooring Standard (5) | EN 14904 | ALL | Class 1 | |
| Vertical Deformation | ASTM F2157/ F2772 | ALL | PASS | |
| Ball Rebound >90% | ASTM F2117/ F2772 | ALL | 99% | |
| Active 50 - Force Reduction | ASTM F2569/ F2772, EN 14808 | 5mm | Class 2 | |
| Active Pro - Force Reduction | ASTM F2569/ F2772, EN 14808 | 7mm | Class 2 | |
| Surface Finish Effect (Slide) 80-110 | ASTM E303/ F2772, EN 13036 | ALL | PASS | |
| Wear Layer | ASTM F1303/ F410 | ALL | Type 1/ Grade 1 | |
| Fire Rating | ASTM E648 | ALL | Class 1 | |
| Resistance to Chemicals | ASTM F925 | ALL | Excellent | |
| Static Load 175 psi | ASTM F970 | ALL | PASS | |
| Phthalate Free (3) | ASTM F3414-20 | ALL | YES | |
| Abrasion Resistance | EN ISO 5470-1 | ALL | 0.095mm PASS | |
| Rolling Load ≥1500 N | EN 1569 | ALL | 0.05mm PASS | |
| Impact Resistance | EN 1517 | ALL | PASS | |
| Color Fastness | EN ISO 105-B02 | ALL | Excellent | |
| Indoor Air Quality (IAQ) (4) | California Section 01350 | ALL | Certified by FloorScore® | |
| ISO 9001:2015 | | YES | Certificate No. IN32570A | |
| ISO 14001:2015 | | YES | Certificate No. IN31472B | |
| Heavy Metals | | ALL | NO | |